

## 16 Sensors

سنسورها



**SH-PR-2200-V3**





**SH-29B**



Production Code	SH-PR-2200-V3
Power Source:	220-240V/AC
Power Frequency:	50Hz
Rated Load:	500W Max.Tungsten(cosφ=1)
Detection Angle	>140°
Detection Range	10±2m Max (22°C)
Light Control:	3LUX~1000LUX(Adjustable)
Time Setting:	10±3sec~10±2min(Adjustable)
Installation Height:	0.4m~1.8m
Power Consumption	0.45W (Static 0.1W)
Detection Motion Speed:	0.6~1.5m/s
Sound Control Sensitivity	30db~90db(Adjustable)
Working Humidity	<93%RH
Working Temperature	-10~+40°C

Production Code	SH-29B
Power Source	220- 240V/AC,50Hz
Rated Load	1200W Max.Tungsten (220-240V/AC) 300W Max.Fluorescent (220-240V/AC) 600W Max.Tungsten (100-130V/AC) 150W Max.Fluorescent (100-130V/AC)
Standby Power: Working	0.45W(Static 0.1W)
Time Setting	10sec~12min(Adjustable)
Light Control	10LUX~2000LUX(Adjustable)
Detection Range	3-10m (Radii.)(Adjustable)
Detection Angle	360° (Ceiling Installation)
Installation Height	2.5~3.5m
Working Temperature	-10°C~+40°C
Detection Motion Speed	0.6~1.5m/s

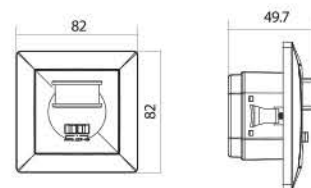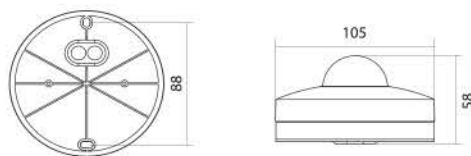

**SH-PR-16F**



Production Code	SH-PR-16F
Detection Range:	180°, 140°
Power Source:	90V/AC~130V/AC 220V/AC~240V/AC
Detection Distance	12m(<24°)
Time-Delay	5sec~7min±2min
Rated Load	1200W(220V/AC)
Ambient Light:	800W(110V/AC) 3LUX~2000LUX(adjustable)
Working Temperature	-10°+40°
Working Humidity	<93%RH
Installation Height	1~3m

**SH-MV-360**



Production Code	SH-MV-360
Power Supply	90-265V AC
Power Frequency(Hz)	50/60
Installation	Indoors, Ceiling Mounting
HF System	5.8GHz CW Radar, ISM Band
Transmission Power	<0.3mW
Rated Load	400-1200W(90-265VAC)
Detection Angle	360°
Reach	2-10m (Radii.), Adjustable
Time Setting	3sec to 12min
Light Control	10~2000LUX
Power Consumption	Approx.0.5W

